

VW-Series LED-backlit Display 55"



**Extremely Narrow Bezel
Displays For Captivating
Uninterrupted Video Walls**




The VW-Series of 55-inch displays is geared for video wall and digital signage use where vivid, eye-catching images are essential. With up to 700 nits of brightness and 1.8mm combined bezels to increase visibility and decrease distractions, these versatile displays incorporate a wide array of video and communication ports and an OPS slot that allows them to adapt to your digital signage needs. The premium-grade panels are further bolstered by Anti-Burn-in™ technology which helps preserve the display in demanding settings, including large venues and even control rooms while performing non-stop 24/7 operations.





10x10 Video Walls or 4K Multi-Streams via DisplayPort

The UniWall™ feature allows the VW-Series to natively support video walls of up to 10x10 displays that are easily connected via DisplayPort or DVI daisy chains. Furthermore, the DisplayPort's multi-stream capability provides the flexibility of creating a 2x2 4K configuration across four panels.

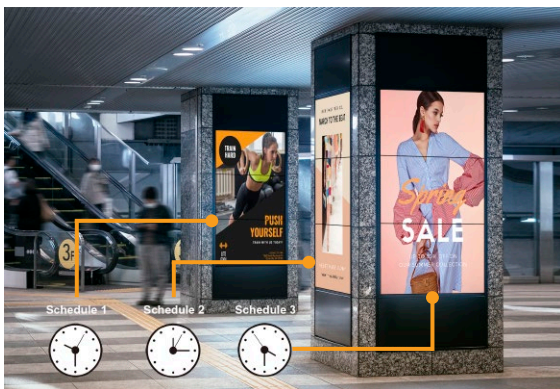

LAN Control Daisy Chain

With the built-in dual LAN ports on the VW-Series displays, all control can be daisy chained through multiple displays by one LAN cable, which reduces the number of cables routed from network switch and installation time.

Features

- Full HD 1920 x 1080 resolution
- 700 nits high brightness panel offers clear images in bright ambient light areas
- Anti-Burn-in™ technology prevents image ghosting
- 1.8mm extremely narrow bezel for borderless LCD video walls
- DisplayPort 1.2 Multistream functionality allows for 4K UHD resolution across a 2x2 video wall
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction / Freeze
- Media Playback: play photos, PDFs, videos and music from a USB drive, micro SD or the internal storage
- An integrated scheduler allows content programming based on source, time and day
- DMR function: play media shared over a local network


Razor-Thin Bezels and High Brightness Panels

To ensure that viewers are presented with a truly immersive visual experience, the VW-Series features panels with brightness levels of up to 700 nits and an anti-glare treatment, which is further enhanced by its 0.9mm even bezels that produce a minuscule 1.8mm bezel-to-bezel transition.



Hassle-Free Management for Large-Scale Digital Signage

The VW-Series' built-in scheduler and OPS slot are complemented by IR, RS232 and LAN loop-through capabilities to easily control, setup and maintain large-scale digital signage video walls installations.

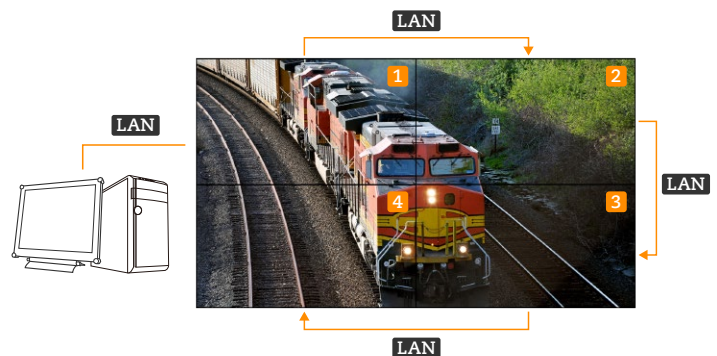

- ALink™ function for synchronized powering on/off via HDMI
- DisplayPort, DVI, RS232, LAN, IR daisy chain support
- Extensive display control: RS232, LAN and PID Command Tool software
- UniWall™ - create video walls (up to 10x10 displays) without third-party equipment
- HeatControl Sensors automatically activate the internal cooling fans when temperature rises
- Selectable gamma curves optimise different kinds of images
- Flexible display orientation: Landscape/Portrait
- Rigorous screening of the components for mission-critical 24/7 applications



Specifications

VW-55H

VW-55D

Panel	Panel Type	LED-Backlit TFT LCD (IPS Technology)	LED-Backlit TFT LCD (IPS Technology)
	Panel Size	54.6"	54.6"
	Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080
	Pixel Pitch	0.630 mm	0.630 mm
	Brightness	700 cd/m ²	500 cd/m ²
	Contrast Ratio	1200:1	1200:1
	Viewing Angle (H/V)	178°/178°	178°/178°
	Display Colour	1.07B	1.07B
	Response Time	5 ms	5 ms
	Surface Treatment	Anti-Glare Treatment (Haze 44%), 3H Hard Coating	Anti-Glare Treatment (Haze 44%), 3H Hard Coating
Frequency (H/V)	H Freq.	31 kHz-92 kHz	31 kHz-92 kHz
	V Freq.	48 Hz-85 Hz	48 Hz-85 Hz
Input	Display Port	1.2 x 1	1.2 x 1
	HDMI	1.3b x 2	1.3b x 2
	DVI	24-Pin DVI-D x 1	24-Pin DVI-D x 1
	VGA	15-Pin D-Sub x 1	15-Pin D-Sub x 1
	Component	BNC x 1	BNC x 1
	Composite	BNC x 1 (Share with Component-Y)	BNC x 1 (Share with Component-Y)
Output	DisplayPort	1.2 x 1	1.2 x 1
	HDMI/DVI/OPS/VGA	29-Pin DVI-I x 1	29-Pin DVI-I x 1
External Control	IR in/out	3.5 mm Phone Jack	3.5 mm Phone Jack
	RS232 in/out	2.5 mm Phone Jack	2.5 mm Phone Jack
	LAN	RJ45 x 2	RJ45 x 2
Other Connectivity	USB	2.0 x 1 (Service Port / Media Playback)	2.0 x 1 (Service Port / Media Playback)
	OPS Slot	Yes	Yes
Audio	Audio In	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)
	Audio Out	Stereo Audio Jack (RCA)	Stereo Audio Jack (RCA)
	Internal Speakers	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)
	Speaker Output (RMS)	10W x 2	10W x 2
Power	Power Supply	Internal	Internal
	Power Requirements	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz
	On Mode	183W (On)	155W (On)
	Stand-by Mode	< 0.5W	< 0.5W
Off Mode	< 0.5W	< 0.5W	
Operating Conditions	Temperature	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)
	Humidity	20%-80%(non-condensing)	20%-80%(non-condensing)
Storage Conditions	Temperature	-20°C-60°C (-4°F-140°F)	-20°C-60°C (-4°F-140°F)
	Humidity	5%-90% (non-condensing)	5%-90% (non-condensing)
Mounting	VESA FPMPMI	Yes (400 x 400 mm)	Yes (400 x 400 mm)
Security	Kensington Security Slot	Yes	Yes
Dimensions	w/o Base (W x H x D)	1211.4 x 682.2 x 98.5 mm (47.7" x 26.9" x 3.8")	1211.4 x 682.2 x 98.5 mm (47.7" x 26.9" x 3.8")
	Packaging (W x H x D)	1475.0 x 983.0 x 375.0 mm (58.1" x 38.7" x 14.8")	1475.0 x 983.0 x 375.0 mm (58.1" x 38.7" x 14.8")
Weight	w/o Base	24.4 kg (53.8 lb)	24.4 kg (53.8 lb)
	Packaging weight	36.4 kg (80.0 lb)	36.4 kg (80.0 lb)
Regulation Approval	Certifications & Compliance	CE,LVD,FCC,BSMI, WEEE, RoHS, REACH	CE,LVD,FCC,BSMI, WEEE, RoHS, REACH
Accessories	Supplied	Power Cord, DVI Cable, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, IR Sensor, Quick Start Guide	Power Cord, DVI Cable, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, IR Sensor, Quick Start Guide
Optional Accessories		Floor Mounts: FMS-01, FMS-02, FMC-02 Video Wall Mounts: VWM-01, VWM-02 Wall Mount: WMA-01 Stand: STD-05 Ceiling Mount (Landscape only): CMP-01 + LMK-01 Wall Mounts (Landscape only): LMK-01, LMK-03 Floor Mounts (Landscape only): FMC-03 + LMK-04, FMC-04 + LMK-04	Floor Mounts: FMS-01, FMS-02, FMC-02 Video Wall Mounts: VWM-01, VWM-02 Wall Mount: WMA-01 Stand: STD-05 Ceiling Mount (Landscape only): CMP-01 + LMK-01 Wall Mounts (Landscape only): LMK-01, LMK-03 Floor Mounts (Landscape only): FMC-03 + LMK-04, FMC-04 + LMK-04

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d IJssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

displays.agneovo.com