


QD-Series LCD Display 75" | 98"

Size Matters:
See The Big Picture in 4K



The QD-Series are big. Featuring 4K UHD (3840 x 2160) resolution and multi-screen viewer, it can replace videowalls with its capability of rendering the most delicate details and delivering four full HD screens simultaneously from four different inputs. Coming with durable metal housing and easily shifting between portrait and landscape modes, the QD-Series make a fitting choice for digital signage and videowalls of all specifications tailored to user needs.

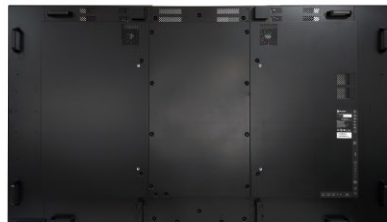



60Hz

120Hz

High Reliability

The QD-Series are crafted specifically to transcend the challenge of enduring 24/7 operations. AG Neovo's Anti-Burn-in™ technology also spares them ghosting while performing mission-critical nonstop operations. Metal casing and rigorously selected components not only help do the trick but also keep maintenance easy.

Unparalleled Visual Quality

The high brightness, high contrast ratio, and black-level alignment deliver an impeccable visual experience. Built on IPS panel with 4 times FHD resolution, the QD-Series render exquisite video quality with motion blur reduction at a refresh rate of up to 120Hz*.

* 120Hz refresh rate supported by QD-98 models only



Easy to Display

The tiling-ready QD-Series can either stand alone replacing videowall set-ups or be arrayed in configurations of up to 10 x 15 videowalls. The QD-Series can also deliver 4K at 60 Hz by single DisplayPort 1.2 cable for the best visual quality.

Multi-screen Viewer; One display, Four screens

Beyond traditional two-input Picture-by-Picture (PiP) feature, the QD-Series' multi-screen viewer can display up to four full HD screens simultaneously from four different input sources. This advanced feature allows it to replace a typical four monitor setup and delivers four-quadrant viewing at crisp and true Full HD content.



PID Command & Ctrl Software

PID Command & Ctrl is a software that allows users to control AG Neovo displays via LAN or RS232 connections. It provides a simple and intuitive interface for remote management, OSD-related settings, and easy control on deployed displays. It also can be used to create video walls within minutes and assist system integrators with setting up displays.

Features

- 4K UHD 3840 x 2160 resolution
- Anti-Burn-in™ technology prevents image ghosting
- DisplayPort 1.2 Multistream functionality allows for 4K UHD resolution across a 2x2 video wall
- Multi-screen Viewer under PiP/PbP function allows displaying up to four split screens from four individual input sources.
- Image Enhancer: Deinterlace / Noise Reduction
- Versatile connectivity: HDMI, DisplayPort, VGA, DVI, Composite, Component
- Daisy chain availability: DisplayPort, RS232 and IR
- IR looping allows easy control via remote controller

- Built-in USB media player for simple signage content delivery
- HeatControl Sensors automatically activate the internal cooling fans when temperature rises
- OPS slot ready for easy media player integration
- Black-level adjustment for presenting more details in dark images
- Selectable gamma curves optimise different kinds of images
- Premium-grade panel for high reliability and long product lifetime
- Rigorous screening of the components for mission-critical 24/7 applications

Specifications

QD-75

QD-98

Panel

Panel Type	LED-Backlit TFT LCD (IPS Technology)	LED-Backlit TFT LCD (IPS Technology)
Panel Size	74.5"	97.5"
Max. Resolution	UHD 3840 x 2160	UHD 3840 x 2160
Pixel Pitch	0.429 mm	0.562 mm
Brightness	410 cd/m ²	500cd/m ²
Contrast Ratio	1200:1	1300:1
Viewing Angle (H/V)	178°/178°	178°/178°
Display Colour	1.07B	1.07B
Response Time	5 ms	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 3%), 2H Hard Coating	Anti-Glare Treatment (Haze 1%), 3H Hard Coating

Frequency

Frequency (H)	31 kHz-92 kHz	31 kHz-92 kHz
Frequency (V)	48 Hz-85 Hz	48 Hz-85 Hz

Signal Input

DisplayPort	1.2 x 1	1.2 x 1
HDMI	2.0 x 3	2.0 x 3
DVI	24-Pin DVI-D	24-Pin DVI-D
VGA	15-Pin D-Sub x 1	15-Pin D-Sub x 1
Component	RCA x 1	RCA x 1
Composite	RCA x 1 (Share with Component-Y)	RCA x 1 (Share with Component-Y)

Signal Output

DisplayPort	1.2 x 1	1.2 x 1
-------------	---------	---------

External Control

IR In	3.5 mm Phone Jack	3.5 mm Phone Jack
IR Out	3.5 mm Phone Jack	3.5 mm Phone Jack
RS232 In	2.5 mm Phone Jack	2.5 mm Phone Jack
RS232 Out	2.5 mm Phone Jack	2.5 mm Phone Jack
LAN	RJ45 x 1	RJ45 x 1

Other Connectivity

USB	2.0 x 1 (Service Port / Media Playback)	2.0 x 1 (Service Port) / 2.0 X 1 (Media Playback)
OPS Slot	Yes	Yes

Audio

Audio In	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)
Audio Out	Stereo Audio Jack (3.5 mm), S/PDIF	Stereo Audio Jack (3.5 mm), S/PDIF
Internal Speakers	10W x 2	10W x 2
Speaker Output (RMS)	10W x 2	10W x 2

Power

Power Supply	Internal	Internal
Power Requirements	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz
On Mode	197W (On)	314W (On)
Stand-by Mode	< 0.5W	< 0.5W
Off Mode	< 0.5W	< 0.5W

Operating Conditions

Temperature	5°C - 40°C (41°F-104°F)	5°C - 40°C (41°F-104°F)
Humidity	20%-80%(non-condensing)	20%-80%(non-condensing)

Storage Conditions

Temperature	-20°C-60°C (-4°F-140°F)	-20°C-60°C (-4°F-140°F)
Humidity	10%-90%(non-condensing)	5%-95% (non-condensing)

Mounting

VESA FPMPI	Yes (600 x 400 mm)	Yes (800 x 500 mm)
------------	--------------------	--------------------

Dimensions

Product w/o Base (W x H x D)	1676.6 x 955.0 x 73.8 mm (66.0" x 37.6" x 2.9")	2193.2 x 1248.2 x 89.8 mm (86.4" x 49.1" x 3.5")
Packaging (W x H x D)	1832.0 x 1283.0 x 280.0 mm (72.1" x 50.5" x 11.0")	2503.0 x 1569.0 x 450.0 mm (98.5" x 61.8" x 17.7")

Weight

Product w/o Base	53.3 kg (117.3 lb)	92.0 kg (202.6 lb)
Packaging	65.5.0 kg (144.1 lb)	126.8 kg (279.4 lb)

Regulation Approval

Certifications & Compliance	CE, CB, WEEE, RoHS, REACH, EAC	CE, CB, WEEE, RoHS, REACH, EAC
-----------------------------	--------------------------------	--------------------------------

Accessories

Supplied	Power Cord, VGA Cable, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, CD	Power Cord, VGA Cable, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, CD
----------	--	--

Optional Accessories

Floor Mount (Landscape only)	FMC-03+LMK-04, FMC-04+LMK-04	FMC-04+LMK-04
Ceiling Mount (Landscape only)	CMP-01+LMK-01	-
Wall Mount (Landscape only)	LMK-01, LMK-03	LMK-03

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d IJssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

displays.agneovo.com